

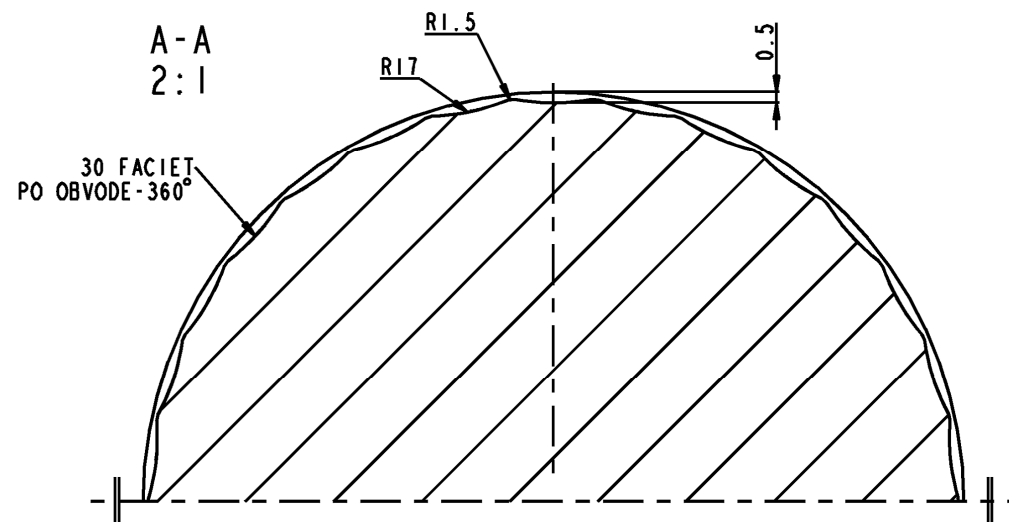


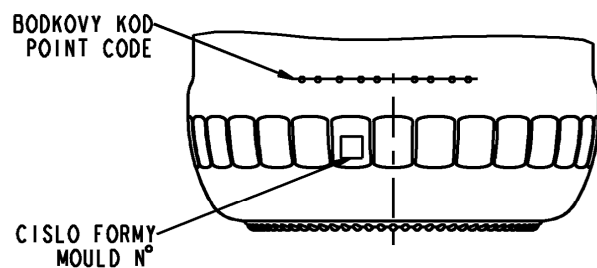

PREVEDENIE DNA
BOTTOM VIEW

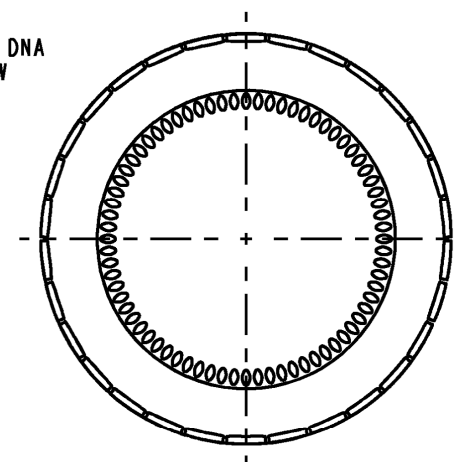

INDEX	ZMENY / Änderungen	DAT	NENO	SUNLAS TECHNOLOGIA PI geprecll	DAT 25.2.04	VIS	TEPLOTA PLMENA Abfuelltemperatur	≤ °C	MONTIAL OBJEN Volumen fuellvoll -- ml ± -- ml	POZHANKA Bezeichnung		
5				SUN.VTR.TTMU FIB FREIGABE	DAT	VIS	TEPLOTA SPRACOVANIA Heidilienterungslamp	≤ °C	TOTAL OBJEN Volumen rendvoll 370 ml ± 10 ml	ZAKAZNIK Kunde		
							OBSAH CO ₂ CO ₂ GERALT	≤ g/l	HNOTNOST Glasgewicht ca. 180 g	PODOBY AHO Aehnlich wie		
								OBSAH ALKOOLU Alkoholgehalt ≤ Vol%	STREDNA HRUBKA STENY Mitll. Wandsloerke mm	NAHRADZUJE Ersetzt Nr		
							NETOLEROVANE ROZHRYTY POOLA DIN 6129 nicht tolerierte Masse nach Norm DIN 6129			AXIÁLNE ZATAZENIE Kapdruck daN		PRIEMER POD USTIM Halsanschluss-D Ø59.5 mm
				POUZITIE Verwendung		NW AN EN	VNUTORNY PRIEMER RALIDRA Halsdurchgang-D min --- mm		NIERNIA Massstab 1 : 1			
				PROCES Prozess		BR PB X EPD	FARBA Farbe WE		KRESLIL Gez Far	DAT 25.2.04		
										HAZO VYROBKU Bezeichnung FACETA 370 ml T.O.66 FDI38		
										VYROBOK CISLO Artikel-Nr 7A010.0370.6077	INDEX A	